



**优洛斯胶带**

Adhesive Tapes

**粘性胶带**

**家电产业用胶带**

electrical appliances & white industry

*Sicad Group*

The adhesive tape experience

司克集团



优洛斯胶带

# 分享粘性胶带的经验

the adhesive tape experience

## 热交换和白色产业 thermal exchange & white industry

一组高技术和高性能的粘性胶带，主要用在装配线上保持产品的各种零件于定位和在运输中固定重且庞大的组件。铝薄胶带也保证能在热交换的过程中发挥最大功能。

A number of highly technical and fully performing adhesive tapes, paramount during assembling lines to keep the various parts of the unit in position and fix heavy or bulky components during transportation. The aluminum tapes also ensure maximum performance during thermal exchange.



## 象征性标题

symbols caption



厚度  
total thickness



粘着力  
adhesion



抗张力  
tensile strength



伸长率  
elongation to break



抗温  
temperature resistance



伏贴性  
conformability




可移动  
removable




热交换  
thermal exchange



初粘力  
tack

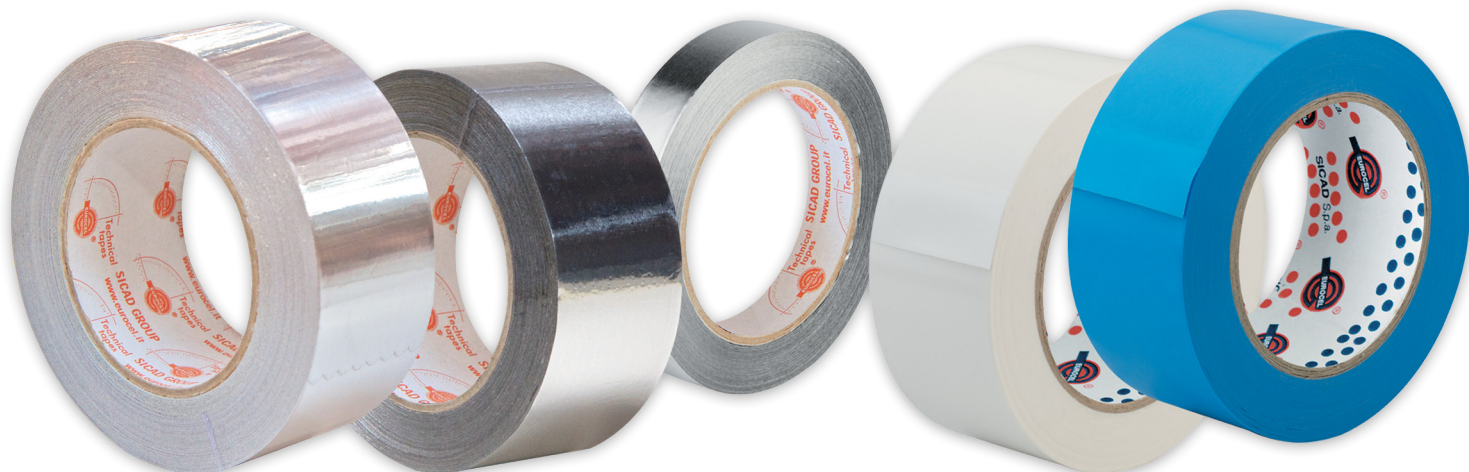

6400 TT

**结构的固定**

单面胶带 设计用于在冰箱/冰库生产过程中固定，封装和保护弯延卷曲的管路，高伏贴性，对绝缘泡棉的粘力好

**Structural fixing**

Single sided tape designed to fix, seal and protect serpentine in the production process of refrigerators and freezers. Highly conformable. Strong anchorage of the insulation foam.

**基材 BACKING**


LDPE 58μm

**粘胶 ADHESIVE**合成橡胶  
synthetic rubber**颜色 COLOUR**白色  
white0.085毫米  
0.085mm20  
牛顿/25毫米  
20 N/25mm30  
牛顿/25毫米  
30 N/25mm

350 %

不适用  
n.a.

6405

**结构性的固定**

单面涂胶设计来固定，封装和保护小的冰箱/冰库在生产过程中弯曲的部分对绝缘泡棉的粘力好，是较薄的6400TT

**Structural fixing**

Single sided version designed to fix, seal and protect serpentine in the production process of small refrigerators and freezers. Strong anchorage of the insulation foam. Thinner version of 6400TT.

**基材 BACKING**

LDPE 50μm

**粘胶 ADHESIVE**合成橡胶  
synthetic rubber**颜色 COLOUR**白色  
white0.071 毫米  
0.071 mm15  
牛顿/25毫米  
15 N/25mm27.5  
牛顿/25毫米  
27.5 N/25mm

415 %

不适用  
n.a.

PP 505

**零件的固定**

中等抗阻胶带，推荐用于生产和运输中固定冰箱内部的塑料零件，和塑料的表面不起化学作用，拨离后不留残胶，抗破碎力佳

**Components fixing**

Medium resistant tape, recommended to fix plastic parts inside refrigerators and freezers during manufacturing and transport. No chemical interaction with application surfaces. Removable without residues. Good resistance to break.

**基材 BACKING**

MOPP 50μm

**粘胶 ADHESIVE**天然橡胶  
natural rubber**颜色 COLOUR**白色  
white0.070毫米  
0.070 mm4.3  
牛顿/25毫米  
4.3 N/25mm350  
牛顿/25毫米  
350 N/25mm

33 %

摄氏60度  
60° C

PP 5052

**较高的粘着力**

是PP505较高粘着力产品，推荐用于生产和运输中固定冰箱中内部的塑料零件，和被贴物表面不起化学作用，拨离后不留残胶，抗破碎力佳

**Higher adhesion**

Higher adhesion version of PP 505, recommended to fix plastic parts inside refrigerators and freezers during manufacturing and transport. No chemical interaction with application surfaces. Removable without residues. Good resistance to break.

**基材 BACKING**

MOPP 50μm

**粘胶 ADHESIVE**天然橡胶  
natural rubber**颜色 COLOUR**蓝色  
white0.080毫米  
0.080 mm8.5  
牛顿/25毫米  
8.5 N/25mm350  
牛顿/25毫米  
350 N/25mm

33 %

摄氏60度  
60° C



# 家电产业用胶带

## electrical appliances & white industry

### PP 550



#### PP505 的蓝色系列

中等抗阻胶带，推荐用于生产和运输中固定冰箱内部的塑料零件，和塑料的表面不起化学作用，拨离后不留残胶，抗破碎力佳

#### Blue version of the PP 505

Medium resistant tape, recommended to fix plastic parts inside refrigerators and freezers during manufacturing and transport. No chemical interaction with application surfaces. Removable without residues. Good resistance to break.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
MOPP 55µm	天然橡胶 natural rubber	蓝色 blue	0.076毫米 0.076 mm	4.3 牛顿/25毫米 4.3 N/25mm	350 牛顿/25毫米 350 N/25mm	33 %	摄氏60度 60° C

### PP 552



#### 较高的粘着力

是PP550较高粘着力产品，推荐用于生产和运输中固定冰箱中内部的塑料零件，和被贴物表面不起化学作用，拨离后不留残胶，抗破碎力佳

#### Higher adhesion

Higher adhesion version of PP 550, recommended to fix plastic parts inside refrigerators and freezers during manufacturing and transport. No chemical interaction with application surfaces. Removable without residues. Good resistance to break.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
MOPP 55µm	天然橡胶 natural rubber	蓝色 blue	0.080 毫米 0.080 mm	8 牛顿/25毫米 8 N/25mm	350 牛顿/25毫米 350 N/25mm	33 %	摄氏60度 60° C

### PP 850



#### 高抗张力，白色 可再贴


高抗张力的MOPP胶带，推荐用于生产和运输中固定冰箱中内部的塑料零件，和被贴物表面不起化学作用，拨离后不留残胶，抗破碎力佳

#### High tensile, removable white

High strength MOPP tape, recommended to fix plastic parts inside refrigerators and freezers during manufacturing and transport. No chemical interaction with application surfaces. Removable without residues.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
MOPP 90µm	天然橡胶 natural rubber	白色 white	0.113毫米 0.113mm	5 牛顿/25毫米 5 N/25mm	615 牛顿/25毫米 615 N/25mm	40 %	摄氏60度 60° C

### PP 8502 HT



#### 较高粘着力，白色 可再贴

是PP850较高粘着力产品，推荐用于生产和运输中固定冰箱中内部较重的塑料零件，和被贴物表面不起化学作用，拨离后不留残胶，抗破碎力佳

#### Higher adhesion, removable white

Higher adhesion version of PP 850, recommended to fix heavy plastic parts inside refrigerators and freezer during manufacturing and transport. No chemical interaction with application surfaces. Removable without residues.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
MOPP 90µm	天然橡胶 natural rubber	白色 white	0.113 毫米 0.113 mm	9 牛顿/25毫米 9 N/25mm	615 牛顿/25毫米 615 N/25mm	40 %	摄氏60度 60° C

## PP 855



### 高抗张力, 蓝色 可再贴

高抗张力的MOPP胶带, 推荐用于生产和运输中固定冰箱中内部的塑料零件, 和被贴物表面不起化学作用, 拨离后不留残胶, 抗破碎力佳

### High tensile, removable blue

High strength MOPP tape, recommended to fix plastic parts inside refrigerators and freezers during manufacturing and transport. No chemical interaction with application surfaces. Removable without residues.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
MOPP 90μm	天然橡胶 natural rubber	蓝色 blue	0.113毫米 0.113mm	5 牛顿/25毫米 5 N/25mm	615 牛顿/25毫米 615 N/25mm	40 %	摄氏60度 60° C

## PP 8552 HT



### 较高粘着力, 蓝色 可再贴

是PP855较高粘着力的产品, 推荐用于生产和运输中固定冰箱中内部较重的塑料零件, 和被贴物表面不起化学作用, 拨离后不留残胶, 抗破碎力佳

### Higher adhesion, removable blue

Higher adhesion version of PP 855, recommended to fix heavy plastic parts inside refrigerators and freezer during manufacturing and transport. No chemical interaction with application surfaces. Removable without residues.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
MOPP 90μm	天然橡胶 natural rubber	蓝色 blue	0.113毫米 0.113mm	9 牛顿/25毫米 9 N/25mm	615 牛顿/25毫米 615 N/25mm	40 %	摄氏60度 60° C

## PP 857



### 较高粘着力, 橘红色 可再贴

推荐用于生产和运输中固定冰箱中内部较重的塑料零件, 和被贴物表面不起化学作用, 拨离后不留残胶, 抗破碎力佳

### High adhesion, removable orange red

Recommended to fix heavy plastic parts inside refrigerators and freezer during manufacturing and transport. No chemical interaction with application surfaces. Removable without residues.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
MOPP 90μm	天然橡胶 natural rubber	橘红色 orange red	0.113 毫米 0.113 mm	9 牛顿/25毫米 9 N/25mm	615 牛顿/25毫米 615 N/25mm	40 %	摄氏60度 60° C

## 9901 TT



### 长期使用

开发用于家用电器行业的生产结构运用上, 高粘力, 优良抗老化和紫外线

### Long term application

Developed for structural applications in the manufacturing of industrial and domestic appliances. High adhesion. Excellent resistance to ageing and UV rays.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
铝薄膜 30μm aluminium foil 30μm	油性压克力胶 acrylic solvent	银色 (白色离型纸) silver (white liner)	0.074毫米 0.074mm	14 牛顿/25毫米 14 N/25mm	57.5 牛顿/25毫米 57.5 N/25mm	8 %	摄氏130度 短期 130°C short period



# 家电产业用胶带

## electrical appliances & white industry

9903 TT



### 高厚度

开发用于家用电器行业的生产结构运用上，高粘力，优良抗老化和紫外线，较好机械阻力

### High thickness

Developed for structural applications in the manufacturing of industrial and domestic appliances. High adhesion. Excellent resistance to ageing and UV rays. Improved mechanical resistance.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
铝薄膜 50μm alluminium foil 50μm	油性压克力胶 acrylic solvent	银色 (白色离型纸) silver (white liner)	0.094毫米 0.094mm	15 牛顿/25毫米 15 N/25mm	100 牛顿/25毫米 100 N/25mm	9 %	摄氏130度 短期 130°C short period

9934 TT



### 热交换


厚的铝薄膜胶带设计来在冰箱和冰库中增加热交换和温度的消散。长久高效率的热交换

### Thermal exchange

Aluminium tape with thick backing designed to increase thermal exchange and temperature dissipation in refrigerators and freezers. High long term thermal exchange efficiency.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
铝薄膜 150μm alluminium foil 150μm	油性压克力胶 acrylic solvent	银色 (白色离型纸) silver (white liner)	0.200毫米 0.200mm	22 牛顿/25毫米 22 N/25mm	275 牛顿/25毫米 275 N/25mm	6.5 %	摄氏100度 100° C

9930



### 高粘着力

设计用于冰箱和冰库生产中结构性的补强，可在自动机器上使用

### High adhesion

Designed for structural application in the manufacturing of refrigerators and freezers. Can be applied on automatic machines.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
铝薄膜 30μm + 28μm BOPP alluminium foil 30μm + 28μm BOPP	合成橡胶 synthetic rubber	银色 silver	0.105毫米 0.105mm	50 牛顿/25毫米 50 N/25mm	105 牛顿/25毫米 105 N/25mm	30 %	摄氏60度 60° C

9940 TT



### 对背面抵抗力佳

设计用于冰箱和冰库生产中的结构性用途，长久固定层层缠绕于箱板上防止泡沫渗透和改善热交换。能在自动机器上使用。

### Resistant backing

Designed for structural application in the manufacturing of refrigerators and freezers. Permanent fixing of the serpentine on panels to avoid foam infiltration and improve thermal exchange. Can be applied on automatic machines.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
铝薄膜 30μm + 28μm BOPP alluminium foil 30μm + 28μm BOPP	油性压克力胶 acrylic solvent	银色 silver	0.091毫米 0.091mm	12.5 牛顿/25毫米 12.5 N/25mm	105 牛顿/25毫米 105 N/25mm	30 %	摄氏100度 短期 100°C short period

## 9940HT TT



### 对背面抵抗力佳

系列，.设计用于冰箱和冷库生产中的结构性用途，长久固定层层缠绕于箱板上防止泡沫渗透和改善热交换。能在自动机器上使用。

#### Mechanical resistance

High tack version of the 9940TT. Designed for structural application in the manufacturing of refrigerators and freezers. Permanent fixing of the serpentine on panels to avoid foam infiltration and improve thermal exchange. Can be applied on automatic machines.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
铝薄膜 30μm + 28μm BOPP aluminium foil 30μm + 28μm BOPP	油性压克力胶 acrylic solvent	银色 silver	0.091毫米 0.091mm	16.2 牛顿/25毫米 16.2 N/25mm	105 牛顿/25毫米 105 N/25mm	30 %	摄氏100度 短期 100°C short period

## FG 10



### 标准的补强胶带

单面涂胶 中性抵抗力，纵向补强，推荐用于纸箱的包装和捆扎，高粘着力和良好的抗破碎力

#### The standard reinforced tape

Single sided tape, medium resistant, longitudinally reinforced, recommended to secure carton boxes or bundles. High adhesion and resistance to break.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
BOPP + glass fiber	合成橡胶 synthetic rubber	transparent	0.110毫米 0.110mm	25 牛顿/25毫米 25 N/25mm	575 牛顿/25毫米 575 N/25mm	6 %	摄氏60度 60° C

## FG BD



### 双向补强胶带

单面涂胶，中性抗破碎力，推荐用于重包装，双向抗张力佳

#### Crossweave reinforced tape

Single sided tape with medium resistance to break, recommended to secure heavy packagings. Resistant to break, also in trasversal direction.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
BOPP + glass fiber cloth	合成橡胶 synthetic rubber	transparent	0.140毫米 0.140mm	25 牛顿/25毫米 25 N/25mm	650 牛顿/25毫米 650 N/25mm	6 %	摄氏60度 60° C

## FP 14S



### 特别粘着力

单面涂胶，纵向PET纤维补强，高抗阻力，推荐用于固定和封闭铝箔线圈，最外层可再贴

#### Special adhesion

Single sided tape, longitudinal PET fibers reinforced PET backing. Highly resistant, recommended to fix and close aluminium coils. Clean removal from the last layer.

基材 BACKING	粘胶 ADHESIVE	颜色 COLOUR					
PET + PET yarns	天然橡胶 natural rubber	transparent	0.195毫米 0.195mm	7.5 牛顿/25毫米 7.5 N/25mm	700 牛顿/25毫米 700 N/25mm	14 %	摄氏60度 60° C

[www.eurocel.it](http://www.eurocel.it)



Sicad S.p.A.  
Via Caduti della Liberazione, 57  
21040 Uboldo, (VA) - Italy

Company with  
Quality Management System Certified  
品质管理系统 UNI EN ISO 9001 :2015

---

The adhesive tape experience

分享粘性胶带的经验